N

Existing stockpile to be removed/processed prior to waste importation

Existing quarry high wall

SW

Other existing stockpiles to be removed/processed

hatching thus indicates area for processing existing stockpiles

existing overburden stockpile to be retained throughout the course of the development

Existing weighbridge and office

WW

Existing access track (concrete)

6 metre-high bund to be completed prior to commencement of site construction

car parking area

Lockable access gate

proposed portacabin offices (see inset)

Stowey Road

Drain

160.6m

Scale Bar (1:1,000)

0 m 50 m 100 m

INSET:

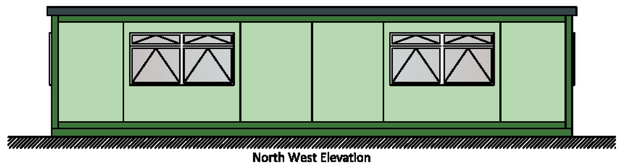

North West Elevation

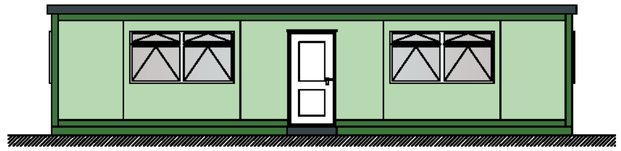

South East Elevation

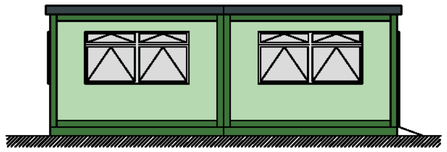

South West Elevation

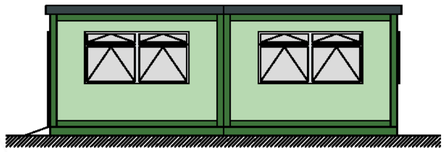

North East Elevation

Oaktree Environmental Ltd

Waste Management and Environmental Consultants

Unit 5, Oasis Park, 19 Road One, Winsford, Cheshire CW7 3RY

Tel: 01606 558833 Fax: 01606 861182

E-mail: sales@oaktree-environmental.co.uk

Title: OPERATIONAL LAYOUT PLAN AND ELEVATIONS

Drawing No: 2055/126/03

Client: Larry Edmunds

Site: Stowey Quarry, Stowey Road, Cameley

Scale: Main (layout) - 1:1,000 Inset (elevations) - 1:100

Date: 6 January 2011 Printed At: A2

Revision: A Drawn By: RS Checked:

Job No: 2055 Client No: 126

KEY:

- French drain (and direction of flow)
- SW Soakaway
- WW Wheelwash
- Site Boundary

Notes:

Drawing indicates the proposed layout of the site during the operational phase of the development which will be maintained prior to the restoration phase. For indication only.

Dimensions of 2 proposed portacabin office/mess facilities = 12 m x 4 m (plan) to a maximum height of 2.8 m. Portacabins will be joined together as shown with internal access.

Exact configuration of windows/doors may be subject to minor amendments. Finishing colours for portacabins shown are indicative. Colours may differ from those shown and are therefore to be agreed with LPA prior to construction.

Reproduced with the permission of the controller of H.M.S.O. Crown copyright licence No. 100015148

Revision Details:

Rev:	Description:	Date:
-	Application copy	08/12/10
A	LPA comments	06/01/11